


Wire Rope Sling - 3 and 4 legs

Product information

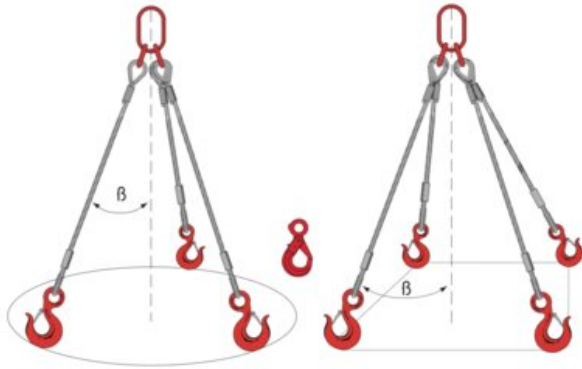

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

WLL table is valid only if the load is equally allocated on the legs

Marking: According to standard

Standard: EN 13414-1

Safety factor: 5:1

Part code	WLL ton
1609	1
1609	2.1
1609	3
1609	4.5
1609	5.6
1609	7
1609	9
1609	11
1609	13
1609	15
1609	19
1609	28
1609	31.5
1609	35.5
1609	40