

Clevis Shackle X-066, painted grade 100 shackle

Product information



- At least 25% greater WLL than traditional Grade 8 products.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C.
- Magnaflux crack detection is performed 100% on each batch.
- Manufactured in accordance with EN 1677- 1 and ASME B30.26.

When fitting G10 components are added to G8 chain, the sling is rated at G8 WLL
... [Read more](#)

Material: Quenched and Tempered Alloy Steel

Marking: According to standard, Size, grade, manufacturer ID, traceability

Temperature range: -40° up to +200°C (without reduction in WLL).

Finish: Blue painted


Standard: EN 1677-1

Safety factor: 4:1

Grade: 10

Clevis Shackle X-066, painted grade 100 shackle

Blueprint

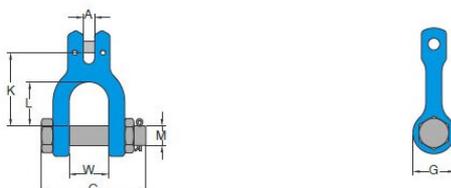

Technical data

| Part code | Chain diameter mm | WLL ton | Weight kg |
|--------------|----------------------|------------|--------------|
| 420100400950 | 10 | 4 | 0.8 |
| 420101000950 | 16 | 10 | 2.5 |