
Lifting Solutions Group
Axel Johnson International

Well-ring Lifter FI

Product information

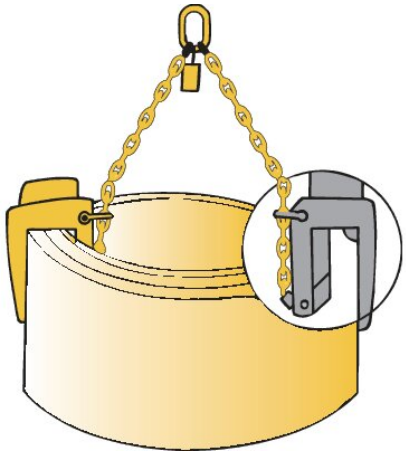

We manufacture two standard sizes of well-ring lifters for lifting and handling of concrete well rings. These have a grab width of 60–120 mm and 100–200 mm, respectively, which cater for the standard well sizes that exist on the market. High friction teeth helps to prevent slidning on ice or mud. Both sizes are available with two or three grabs.

Supplied complete with chain sling, 1,5m chain per leg. If large well rings are to be handled, they will balance better if three grabs are used. Designed for well ring diameters 60 - 180 cm. Handle for easy attach and release.

... *Read more*

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Well-ring Lifter FI

Technical data

Part code	WLL ton	Jaw width mm	Number of grabs
655600201200010	2	60-120	2
655600202000010	2	100-200	2
655600301200010	3	60-120	3
655600302000010	3	100-200	3

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved