

Alloy Swivel Bearing Hoist Hook 8-175N

Product information



Built with ball bearing and enables full swivel feature under load. At least 25% greater WLL than traditional Grade 8 products. Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL. Magnaflux crack detection is performed 100% on each batch. [... Read more](#)

Material: Quenched and Tempered Alloy Steel.

Marking: According to standard

Temperature range: Tempering temperature minimum 400°C


Standard: EN 1677-1

Safety factor: 4:1

Grade: 10

Alloy Swivel Bearing Hoist Hook 8-175N

Blueprint

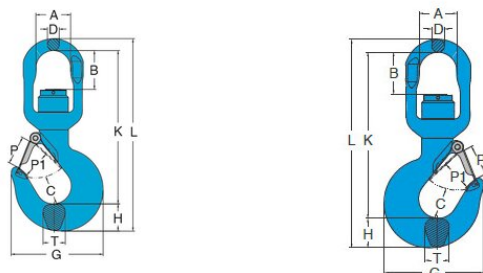

Technical data

| Part code | Chain diameter mm | WLL ton | Type | A mm | B mm | C mm | D mm | G mm | H mm | K mm | L mm | P mm | P1 mm | T mm | Weight kg |
|--------------|-------------------|---------|------|------|------|------|------|------|------|------|------|------|-------|------|-----------|
| 420500200660 | 7-8 | 2 | CC | 36 | 29 | 26 | 13 | 91 | 25 | 143 | 181 | 24 | 20 | 22 | 0.9 |