

CERTEX | Lifting Solutions Group
Axel Johnson International

Elevator rope 8x19S-IWRC

Product information

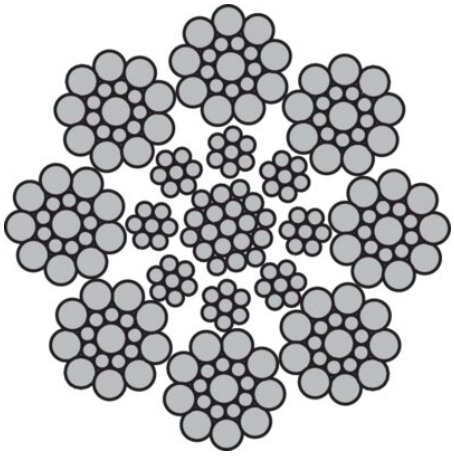

Elevator



General: Steel wire rope for use in elevator.

Tolerance Ø: ≤10 mm 0% − +6%, >10 mm 0% − +5%.

... *Read more*

Rope construction: 8x19-IWRC.
Marking: According to standard
Finish: Ungalvanised
Standard: EN 12385-5

Fill factor: 0.59

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Elevator rope 8x19S-IWRC

Technical data

Part code	Rope diameter mm	Tensile strength N/mm²	Finish	Rope lay	Min. breaking force kN	Steel area mm²	Lubrication	Weight kg/100m
106100804020219	8	1,570	Bright	sZ	37.9	31.1	SupplierStandard	27
106100904020219	9	1,570	Bright	sZ	48	38.1	SupplierStandard	34
106101004020219	10	1,570	Bright	sZ	58.5	46.6	SupplierStandard	41
106101104020219	11	1,570	Bright	sZ	69.7	55.6	SupplierStandard	49
106101204020219	12	1,570	Bright	sZ	83.6	66.4	SupplierStandard	59
106101304020219	13	1,570	Bright	sZ	100	79.5	SupplierStandard	70
106101404020219	14	1,570	Bright	sZ	116	91.8	SupplierStandard	81
106101504020219	15	1,570	Bright	sZ	131	104	SupplierStandard	92
106101604020219	16	1,570	Bright	sZ	148	118	SupplierStandard	105

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved