

Turnable lifting point, grade 80

Product information



- turnable lifting point for all lifting directions.
- eye turns to the direction of the load
- bolts also available with 120 mm thread
- bolt grade 10.9

... [Read more](#)

Material: Steel

Marking: According to standard, CE-marked

Temperature range: -40°C – (+)200°C


Finish: Painted, yellow

Standard: EN 1677-1

Safety factor: 4:1

Turnable lifting point, grade 80

Blueprint




Technical data

Part code	WLL ton	Thread mm	Packing Qty.	Thread length mm	Tightening torque Nm	Thread pitch mm	A mm	B mm	C mm	D mm	EL mm	F mm	G mm	H mm	S mm	SW mm	L1 mm	Weight kg
4215NS8P0803	0.3	M8	40	11	30	1,25	33	37	35	14	11	98	57	36	6	13	47	0.5
4215NS8P0803120	0.3	M8	-	120	30	1,25	33	37	35	14	120	98	57	36	6	13	156	0.5
4215NS8P10063	0.63	M10	40	16	60	1,5	33	37	36	14	16	98	57	36	6	17	52	0.5
4215NS8P10063120	0.63	M10	-	120	60	1,5	33	37	36	14	120	98	57	36	6	17	156	0.5
4215NS8P121	1	M12	40	18	100	1,75	33	37	44	14	18	98	57	36	8	19	54	0.5
4215NS8P121120	1	M12	-	120	100	1,75	33	37	44	14	120	98	57	36	8	19	156	0.5
4215NS8P1615	1.5	M16	40	24	150	2	33	37	46	14	24	98	57	36	10	24	60	0.5
4215NS8P1615120	1.5	M16	-	120	150	2	33	37	46	14	120	98	57	36	10	24	156	0.5
4215NS8P2025	2.5	M20	10	30	250	2,5	50	54	57	17	30	140	82	44	12	30	74	1.3
4215NS8P2025120	2.5	M20	-	120	250	2,5	50	54	57	17	120	140	82	44	12	30	164	1.3
4215NS8P244	4	M24	10	36	400	3	50	54	59	17	36	140	82	44	14	36	80	1.4
4215NS8P244120	4	M24	-	120	400	3	50	54	59	17	120	140	82	44	14	36	164	1.4
4215NS8P305	5	M30	6	48	500	3,5	60	65	81	23	48	170	99	62	17	46	110	3.1
4215NS8P305120	5	M30	-	120	500	3,5	60	65	81	23	120	170	99	62	17	46	182	3.1
4215NS8P368	8	M36	4	62	800	4	77	85	101	27	62	225	124	78	22	55	140	5.8
4215NS8P368120	8	M36	-	120	800	4	77	85	101	27	120	225	124	78	22	55	198	5.8
4215NS8P4215	15	M42	2	63	1,500	4,5	95	104	112	36	63	256	158	86	24	65	149	10.8
4215NS8P4215120	15	M42	-	120	1,500	4,5	95	104	112	36	120	256	158	86	24	65	206	10.8
4215NS8P4820	20	M48	2	72	2,000	5	95	104	120	36	72	259	158	90	27	75	162	11.6
4215NS8P4820120	20	M48	-	120	2,000	5	95	104	120	36	120	259	158	90	27	75	210	11.6

Turnable lifting point, grade 80

WORKING LOAD LIMITS

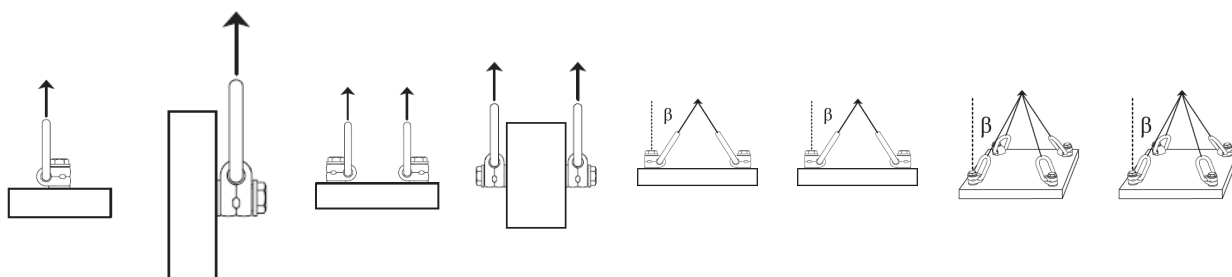

Thread	WLL (t)	WLL (t)	WLL (t)	WLL (t)	WLL (t)		WLL (t)	
					0 - 45°	45-60°	0 - 45°	45-60°
M8	0,3	0,3	0,6	0,6	0,42	0,3	0,63	0,45
M10	0,63	0,63	1,26	1,26	0,88	0,63	1,32	0,95
M12	1	1	2	2	1,4	1	2,1	1,5
M16	1,5	1,5	3	3	2,1	1,5	3,1	2,2
M20	2,5	2,5	5	5	3,5	2,5	5,2	3,7
M24	4	4	8	8	5,6	4	8,4	6
M30	5	5	10	10	7	5	10,5	7,5
M36	8	8	16	16	11,2	8	16,8	12
M42	15	15	30	30	21	15	31,5	22,5
M48	20	20	40	40	28	20	42	30