
Lifting Solutions Group
Axel Johnson International

Roundsling Assembly RR-276

Product information

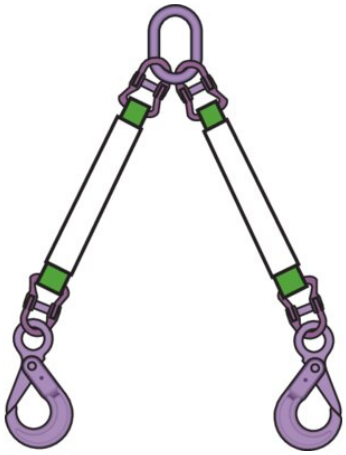

Design: Roundsling covered with extra protection sleeve and provided with strengthen eye in each end, assembled as a tool in combination with lifting details in grade 8. Max manufacturing length 20 m.

Stretch with working load: 2-3%.

Length tolerance: Nominal length ±2%.

Safety factor: Forge 4:1 and round sling 7:1

... *Read more*

Material: Polyester. Resistant to most acids but not strong alkalizes.
Marking: According to standard, The slings are provided with a label with manufacturer's symbol, working load limit (WLL) and CE marking.
Temperature range: app. -40° - +100°C.
Standard: EN 1492-2

Grade: 10

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Roundsling Assembly RR-276

Technical data

Part code	WLL ton	Colour
3403	1.4	Violet
3403	2.8	Green
3403	4.2	Yellow
3403	5.6	Grey
3403	7	Red
3403	8.4	Brown
3403	11.2	Blue
3403	14	Orange

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved