
Lifting Solutions Group
Axel Johnson International

Roundsling Assembly RR-476

Product information

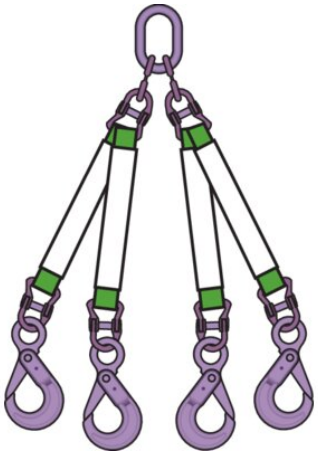

Design: Roundsling covered with extra protection sleeve and provided with strengthen eye in each end, assembled as tool in combination with lifting details in grade 8. Max manufacturing length 20 m.

Stretch with working load: 2-3%.

Length tolerance: Nominal length ±2%.

Safety factor: Forge 4:1 and round sling 7:1.

... *Read more*

Material: Polyester. Resistant to most acids but not strong alkalizes.
Marking: According to standard, The slings are provided with a label with manufacturer's symbol, working load limit (WLL) and CE marking.
Temperature range: app. -40° - +100°C.
Standard: EN 1492-2

Grade: 10

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Roundsling Assembly RR-476

Technical data

Part code	WLL ton	Colour
3403	2.1	Violet
3403	4.2	Green
3403	6.3	Yellow
3403	8.4	Grey
3403	10.5	Red
3403	12.6	Brown
3403	16.8	Blue
3403	21	Orange

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved