
Lifting Solutions Group
Axel Johnson International

Anchor Point ABS - Lock X-Rivet

Product information

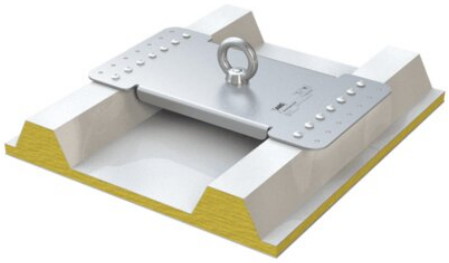

Anchorage point - designed for riveting onto sandwich and trapezoidal sheeting. Anchor point ABS-Lock X-Rivet is simply riveted on top of roof membrane using 14 watertight blind rivets.

The 2 different base plates can be used for different seam intervals.

- LX-SW-N-250 -> Distance between the holes: 180-250 mm
- LX-SW-N-333 -> Distance between the holes: 280-333 mm

Also available as an intermediate (“ZW”) bracket in a lifeline system in 2 heights.

- LX-SW-N-...-ZW -> Bracket height 150 mm
- LX-SW-N-...-ZW-350 -> Bracket height 350 mm

For steel plating: ≥ 0.45 mm;
Aluminium: ≥ 0.8 mm.

Force directions: Lateral.
Substructure: Sandwich, trapezoidal sheeting, profile roof.
Attachment: Riveted
Application: Profile Roof, flat roofs

... *Read more*

Material: Stainless steel
Marking: According to standard
Standard: EN 795, CEN/TS/16415
Note: Installation materials included

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Anchor Point ABS - Lock X-Rivet

Technical data

Part code	Code	Max. number of persons	Weight kg
8415LXSWN250	19.10LX-SW-N-250	3	2.012
8415LXSWN333	19.10LX-SW-N-333	3	2.129
8415LXSWN250ZW	19.10LX-SW-N-250-ZW	3	2.34
8415LXSWN333ZW	19.10LX-SW-N-333-ZW	3	2.457
8415LXSWN250ZW350	19.10LX-SW-N-250-ZW-350	3	2.712
8415LXSWN333ZW350	19.10LX-SW-N-333-ZW-350	3	2.829

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved