




Trulift 8F

Product information

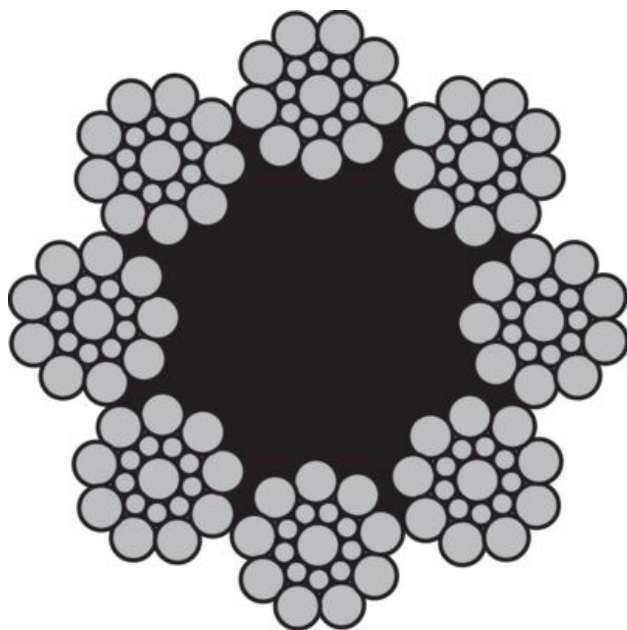

Also available in Filler (12/6&6F/1) and Warrington (6&6/6/1) constructions.
Excellent stretch characteristics.

Features: High quality eight strand fibre core lift rope.

Marking: According to standard


Finish: Ungalvanised.

Standard: EN 12385-5

Fill factor: 0.44

Tolerance Ø: 0% to +6%

Elevator



Part Code	Rope Diameter, mm	Steel area mm ²	Min. Breaking force kN. 1370/1770 N/mm ²	Weight kg/100m
106100804130079	8	22	28.1	22.2
106100904130079	9	28.3	35.6	28
106101004130079	10	34.9	44	34
106101104130079	11	42.2	53.2	41
106101204130079	12	50.3	63.3	49
106101304130079	13	59	74.3	58
106101404130079	14	68.4	86.1	67
106101504130079	15	78.5	98.9	77
106101604130079	16	89.3	113	87
106101904130079	19	126	159	123
106102204130079	22	169	213	165