
CERTEX | Lifting Solutions Group
Axel Johnson International

Wire Rope Lifting Sling WLS-002

Product information

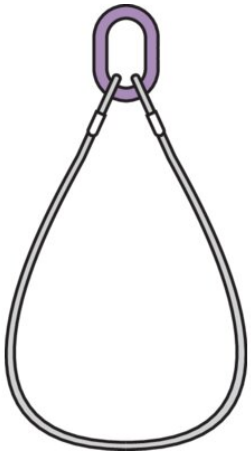

Standard steel wire rope construction: 6x36WS IWRC, 1960N/mm2*
(*ø 3mm - ø 7mm rope constrcution: 6x19M WSC 1960 N/mm2)
Design: Endless with master link and mechanical aluminium spliced thimbles.

Load table at Technical Data -> Show table

Please specify the needed (working) length with your request.

Other rope constructions possible on request. In that case, please contact us to discuss the possible options or specify it with your request.

... *Read more*

Note: We recommend that the sling not is bent over a diameter less than 6 times the wire rope diameter without reducing the WLL.

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved

CERTEX | Lifting Solutions Group
Axel Johnson International

Wire Rope Lifting Sling WLS-002

Technical data

Part code	Diameter mm	WLL ton
1601	3	0.23
1601	4	0.42
1601	5	0.65
1601	6	0.94
1601	7	1.28
1601	8	1.64
1601	9	2.07
1601	10	2.56
1601	11	3.1
1601	12	3.67
1601	13	4.33
1601	14	5.03
1601	16	6.57
1601	18	8.3
1601	20	10.24
1601	22	12.41
1601	28	16.8
1601	26	17.33
1601	24	17.46
1601	32	20.08
1601	36	26.25
1601	40	33.19
1601	44	41.11
1601	48	49.56
1601	52	59.1
1601	56	69.38

Certex Latvija
info@certex.lv
+371 67611882

© November 2026 - All Rights Reserved