

## Lifting Eye RUD ACP-TURNADO

### Product information



- Unique RUD spring mechanism
- No stopping of the lifting bale
- No dangerous transverse loads - no worst case
- Integrated RFID transponder to make checks easier
- Wear lenses for checking discard criteria

Also available in long version.

[... Read more](#)

**Marking:** According to standard


**Temperature range:** -40°C up to +100°C.

**Standard:** EN 1677-1

**Safety factor:** 4:1

# Lifting Eye RUD ACP-TURNADO

## Blueprint

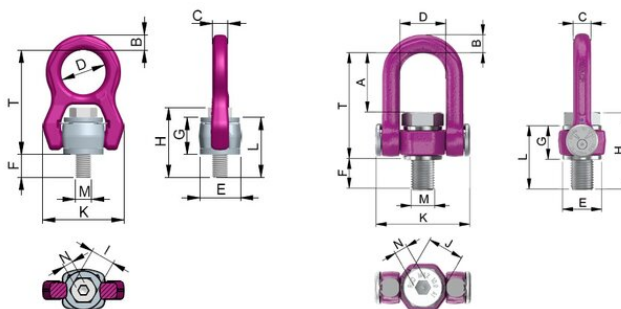

## Technical data

| Part code   | WLL ton | Thread mm | A mm  | B mm | C mm  | D mm | E mm | F mm | G mm | H mm  | I mm | K mm  | L mm | M mm | N mm | T mm | Weight kg |
|-------------|---------|-----------|-------|------|-------|------|------|------|------|-------|------|-------|------|------|------|------|-----------|
| 42157912061 | 0.7     | M8        | -     | 11   | 10.5  | 38   | 30   | 12   | 28   | 45    | 13   | 58    | 40   | M8   | 5    | 83   | 0.36      |
| 42157912064 | 1       | M10       | -     | 11   | 10.5  | 38   | 30   | 16   | 28   | 50.4  | 17   | 58    | 44   | M10  | 6    | 83   | 0.37      |
| 42157909314 | 1.35    | M12       | -     | 11   | 10.5  | 38   | 30   | 19   | 28   | 54.5  | 19   | 58    | 47   | M12  | 8    | 83   | 0.38      |
| 42157909316 | 2.5     | M16       | -     | 14   | 14    | 50   | 40   | 22   | 36   | 68    | 24   | 76    | 58   | M16  | 10   | 107  | 0.88      |
| 42157909317 | 4       | M20       | -     | 17   | 17.25 | 50   | 45   | 26.5 | 43.5 | 82.5  | 30   | 89    | 70   | M20  | 12   | 118  | 1.41      |
| 42157909318 | 6.3     | M24       | -     | 23   | 23    | 66   | 60   | 34   | 55   | 104   | 36   | 120.5 | 89   | M24  | 14   | 154  | 3.16      |
| 42157909319 | 8       | M30       | -     | 29   | 27    | 75   | 75   | 41.5 | 68.5 | 128.7 | 46   | 148   | 110  | M30  | 17   | 183  | 5.69      |
| 42157911052 | 12.5    | M36       | 106   | 32   | 32    | 82   | 70   | 45   | 60   | 128   | 55   | 168   | 105  | M36  | 22   | 189  | 7.1       |
| 42157911053 | 16      | M42       | 106   | 32   | 32    | 82   | 70   | 53   | 60   | 136   | 65   | 168   | 113  | M42  | 24   | 189  | 7.5       |
| 42157912630 | 20      | M48       | 127   | 45   | 45    | 103  | 90   | 61   | 78.5 | 169   | 75   | 204   | 139  | M48  | 24   | 235  | 16.04     |
| 42157912631 | 24      | M52       | 123.5 | 45   | 45    | 103  | 95   | 65   | 108  | 173   | 75   | 204   | 145  | M52  | 24   | 232  | 16.34     |
| 42157912632 | 27      | M56       | 123.5 | 45   | 45    | 103  | 95   | 70   | 108  | 178   | 75   | 204   | 150  | M56  | 24   | 232  | 16.5      |
| 42157912633 | 32.5    | M64       | 123.5 | 45   | 45    | 103  | 95   | 80   | 108  | 188   | 75   | 204   | -    | M64  | 24   | 232  | 17.19     |
| 42157912634 | 32.5    | M72       | 123.5 | 45   | 45    | 103  | 95   | 90   | 108  | 198   | 75   | 204   | -    | M72  | 24   | 232  | 18.21     |
| 42157912635 | 32.5    | M80       | 123.5 | 45   | 45    | 103  | 100  | 100  | 108  | 208   | 75   | 204   | -    | M80  | 24   | 232  | 19.32     |
| 42157912636 | 32.5    | M90       | 123.5 | 45   | 45    | 103  | 110  | 113  | 116  | 229   | 75   | 204   | -    | M90  | 24   | 240  | 21.52     |
| 42157912637 | 32.5    | M100      | 123.5 | 45   | 45    | 103  | 120  | 125  | 116  | 241   | 75   | 204   | -    | M100 | 24   | 240  | 23.78     |