

## Beam Clamp IPSTARTEC11

---

### Product information



IPSTARTEC11 lifting clamps are suitable for horizontal (with flanges horizontal) lifting, transport, stacking and controlled tilting of steel IPE- en HEA-profiles. By placing the chain guide in the appropriate position, it is easy to switch from lifting to tilting and back again, which shifts the center of gravity.

#### Features:

- Available in capacities of 1.5 and 2.5 metric tons.
- Jaw openings available: 6 to 20mm.
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- All sizes are RFID EQUIPPED.

... [Read more](#)

---

#### Features:

**Material:** Alloy steel.


**Marking:** According to standard, CE-marked, WLL, Logo, Jaw opening, Serial number

**Temperature range:** -40°C up to +100°C

**Standard:** EN 13155

## Beam Clamp IPSTARTEC11

### Blueprint

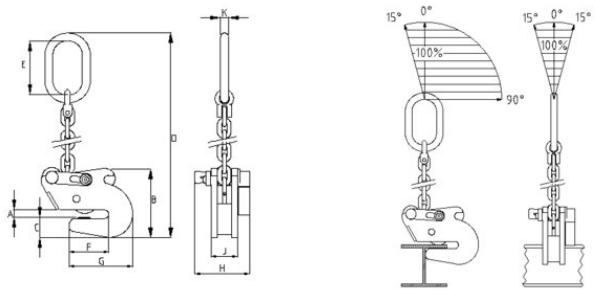

### Technical data

Part code	WLL ton	Jaw width mm	Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	K mm	Weight kg
502100150120240	1.5	6-12	1.5-IPSTARTEC11	6-12	140	39	575	110	81	129	126	54	16	6.6
502100250200240	2.5	6-20	2.5-IPSTARTEC11	6-20	210	55	725	135	115	182	140	74	18	14.5