


Lubricant Brilube 40

Product information

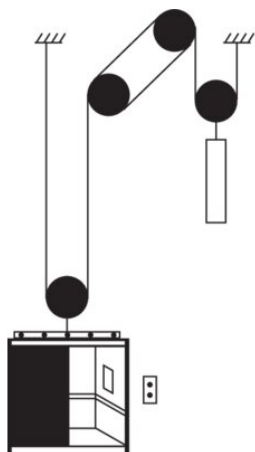

Typical applications: Lifts, elevators and similar friction driven rope installations.

General: A synthetic lubricant which deposits a slip-resistant film on the wire surfaces. Formulated for use where frictional grip is vital, it provides internal lubrication whilst avoiding excessive build-up with repeated applications.

Minimum application temperature: -5°C.

Application method: Dipping or brushing.

[... Read more](#)

Temperature range: -80°C up to +40°C

Lubricant Brilube 40

Technical data

Part code	Packing
1425LUBE43	20 l
1425LUBE44	205 l