


## Lifting Triangle

---

### Product information

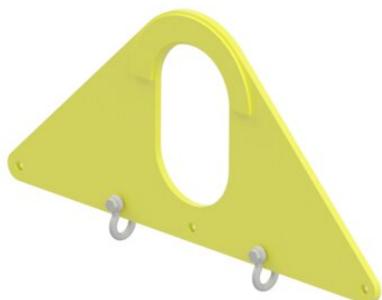

### **CERTEX**

**General:** The lifting triangle has the same function as a short beam or a spreader. Given working load limits are valid for a maximum top sling angle of 90°. For top angles between 90°-120° working load limit shall be reduced by 30%. All lifting triangles are supplied with 2 shackles according to table. Working load limit in the centre shackle hole is equal to the working load limit of the shackle according to the table.

**Design:** Cut sheet metal. Wear plates and spacers for the shackles.

**Proof:** Batch proof 2 x WLL.

[... Read more](#)

---

**Material:** Plate of high-strength structural steel.


**Marking:** WLL and CE-marking.

**Finish:** Yellow painted.

**Note:** Other loads and dimensions are available on request.

## Lifting Triangle

### Blueprint



### Technical data

Part code	WLL ton	Shackle	A mm	B mm	H, mm	K mm	L mm	Weight kg
620566700209	2	11.311	250	150	340	290	700	13
620566700409	4	11.311	250	150	360	290	700	20
620566700609	6	11.311	250	150	375	290	700	31
620566701009	10	11.311	300	180	460	360	870	55
620566701509	15	11.311	300	180	490	360	870	74
620566702009	20	11.311	300	180	525	360	870	100