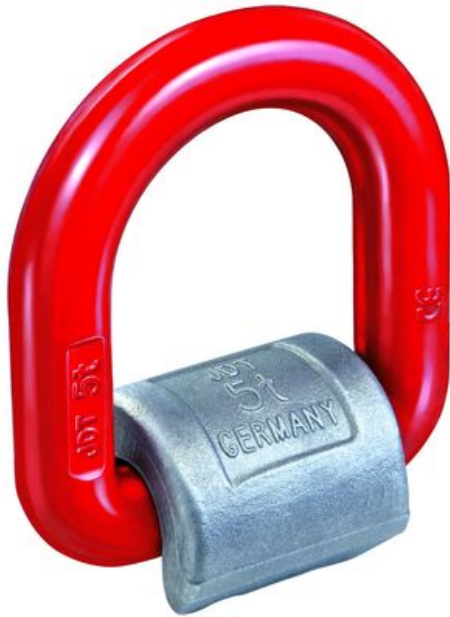




Lifting Eye APS

Product information

Advantages:

- Compact design
- Secured four times against breakage
- D-link swings 180°
- Weld-on shackle made of material S355JR according to EN 10025
- Also loadable transversely to the swivel direction

Material: Eye of alloy steel. Welding attachment of steel St 52.

Marking: CE-marked, WLL.



Finish: Painted.

Note: The surface that the lifting eyes shall be attached to shall be flat and tolerate the load it is going to be exposed to.

Safety factor: 4:1

Part Code	Code	WLL ton	a mm	b mm	c mm	ø d mm	e mm	f mm	l mm	Weight kg
4215381701000	TAPS 1	1.12	32	38	32	13	25	70	42	0.32
4215381703000	TAPS 3	3.15	47	56	50	18	36	92	54	0.84
4215381705000	TAPS 5	5.3	55	67	60	22	46	111	63	1.56
4215381708000	TAPS 8	8	68	80	68	26	54	127	68	2.62
4215380415000	TAPS 15	15	82	125	100	30	60	190	120	5.4
4215380420000	TAPS 20	20	125	150	125	46	90	254	155	16
4215380425000	TAPS 25	25	135	170	140	52	100	288	175	22.8
4215380430000	TAPS 30	30	155	200	170	57	110	334	210	32.3
4215380435000	TAPS 35	35	170	200	170	57	120	346	210	34.7
4215380440000	TAPS 40	40	180	210	185	62	130	363	220	45.2
4215380445000	TAPS 50	50	190	230	180	73	135	395	235	56.5
4215380463000	TAPS 63	63	190	230	195	73	135	395	235	56.5

Technical data

kind of attachment								
	1	1	2	2	2	3 o. 4		
inclination angle	0°	90°	0°	90°	0°- 45°	45°- 60°	0°- 45°	45°- 60°
Code	WLL ton							
t	t	t	t					

Blueprint

